


Roff-Off Roller Cradle

This cradle uses free running rollers mounted on bearings to hold cloth rolls with broken core or without core up to 150cm (5-ft) wide for off-rolling purposes. Ideal for customers who like to lay out cloth onto a long table and cut. This cradle is for cloth roll dia. up to 27cm (11").

Larger cradles for cloth rolls 40cm dia. (item No. **CR-004**) and for cloth rolls 50cm dia. (item No. **CR-005**) also available on request.

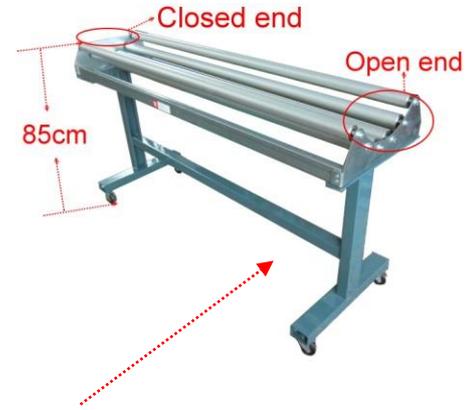

Item No. CR-003A standard-one "closed" end & the other end is "open"
Item No. CR-003B both ends are "open" to hold cloth roll up to 7'(210cm)

Item No. CR-003AS or CR-003BS Height : 85cm
 Roller cradle complete with stand + wheels
 Simply place the cloth roll into the cradle and then position at the end of a laying up table and pull the cloth onto the table top. The wheels make it very portable. Suitable for table 83cm high.
 Higher stand is also available upon request.



- No. **CR-003/1** 1ft.(30cm) wide
- CR-003/2** 2 ft. (60cm) wide
- CR-003/3** 3ft. (90cm) wide
- CR-003/4** 4ft. (120cm) wide

Can be connected together to hold wider roll up to 6ft.,7ft.,8ft.,9ft., and 10 ft.

Stainless Steel Cloth Clamps



CL12S
6cm wide & 5cm opening



CL80S
12cm wide & 8cm opening



CL70S
12cm wide & 7cm opening w/floating jaw

Adjustable

- CL4AA-ST** 4" (10cm)
- CL6AA-ST** 6" (15cm)
- CL8AA-ST** 8" (20cm)
- CL10AA-ST** 10" (25cm).

It is used to hold multiple layers of fabric together. Just press down on the spring loaded top plate and it will clamp down. Press again to release (open).



Fabric Shrinking & Forming Machine

AMC-240

LENGTH	EFFECTIVE WIDTH
96" (2500mm)	Max. 62.4" (2000mm)
WIDTH	RELEASE SWING
90.28" (2257mm)	Max. 32" (800mm)
HEIGHT	CLOTH DIAMETER
62.4" (1560mm)	Max. 14" (350mm)
RATED VOLTAGE	RELEASE SPEED
3 PHASE 220V	0~15m/min
POWER CONSUMPTION	VAPOR PRESSURE
3HP+24KW	0.5Mpa~0.7Mpa

APPLICATION

- * Smooth the clothing's cutting process.
 - * Keep the clothing's dimension and shape stable.
 - * Reduce the fabric shrinking problems after ironing during the sewing procedure.
 - * To bring better effect for bonding fabric & interlining. After shrinking and shaping in advance, the fabrics are without the shrinking problems of cutting、sewing or ironing.
- It is easy to produce and increase the additional values of the products

*Steamed fabric pre-shrinking and automatic constant-temperature drying zone, vacuumed suctioning, cooling, shaking and folding of fabric



Item No. AMC-240

