

Made in Taiwan

2-Needle Unison Feed Flatbed Lockstitch Sewing Machine



models :

EM-1560

for heavy materials

EM-1560-T

for thick thread (#0)

EM-1560-FL

with pneumatic auto-lifter

EM-1560-BT

with automatic backtack and auto-lifter




Features:

- * With the adoption of a new complete rectangular feed mechanism, an alternating vertical movement mechanism, and a unison-feed mechanism, the machine can feed heavy materials for industrial use, such as cargo handling belts, car seat, sofas, and bags.
- * The maximum stitch length is 9mm, the needle bar stroke is 38mm. and an extra large steel hand-wheel with a diameter as large as 175mm, the machine supports the sewing of extra heavy materials.



Safety Clutch

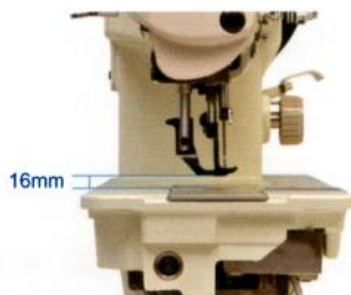

16mm



SPECIFICATIONS

Max. sewing speed	2,500 s.p.m.	Working space	255 mm / 635mm
Max. stitch length	9 mm	Lubrication	Automatic
Lift of the presser foot	9 mm by Hand 16 mm by Knee	Needle to be used	DPx17 #23
Alternating vertical movement	2.5~6.5 mm	Needle system	#20 ~ #25
Needle gauge	4.8mm, 6.4mm, 7.9mm 9.5mm, 12.7mm (3/16, 1/4, 5/16, 3/8, 1/2)	Thread	#20 ~ #1
Needle bar stroke	38 mm	Motor to be used	Clutch Motor, 1/2HP, 4P



Long arm 25" (635mm) work space

models :

EM-1560-25

EM-15060-25-T

EM-15060-25-FL

EM-15060-25-BT

for heavy materials

for thick thread (#0)

with pneumatic auto-lifter

with automatic backtack and auto-lifter