



## 1-Needle Compound Feed Walking Foot Lockstitch Sew. Machine

- \* With horizontal-axis large hook.
- \* Larger needle bar stroke.
- \* Rectangular feeding motion ensuring consistent feeding quality.

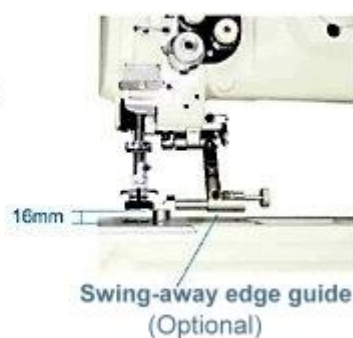

- mod. EM-1541 without safety mechanism  
 EM-1541-S with safety mechanism  
 EM-1541-FL with pneumatic auto foot lifter  
 EM-1541-BT with automatic backtack and foot lifter



### SPECIFICATIONS :

Max. sewing speed	2,500 s.p.m.	Working space	255 mm
Max. stitch length	9 mm	Needle to be used	DPx17 #23
Lift of the presser foot	9 mm by Hand 16 mm by Knee	Needle system	#20 ~ #25
Alternating vertical movement	2.5~6.5 mm	Thread	#30 ~ #5
Needle bar stroke	36 mm	Motor to be used	Clutch Motor, 1/2HP,4P