


## Extra Heavy Duty, Long Arm, Upper & Lower Feed, Lockstitch Sewing Machine

**EM-733R** (Foot lift : 26mm & sewing thickness 0 ~ 25mm)  
**Mod. EM-733R-FH1** (Foot lift : 32mm & sewing thickness 5 ~ 32mm)  
**EM-733R-FH2** (Foot lift : 32mm & sewing thickness 0 ~ 25mm)

This machine is equipped with semi-rotary large capacity shuttle hook, suitable for sewing extra heavy weight materials, such as safety and logging belts, luggage, cargo slings, buffing wheel, harnesses, construction barriers, parachutes, balloons and book binding.

### FEATURES :

- \* With upper & lower feed, the machine can sew accurately and easily several layers of heavy weight materials piled up together.
- \* The lifting amount of presser foot is as high as 26mm(1") mod. **EM-733R** or 32mm(1-1/4") mod. **EM-733R-FH1 & FH2**, suitable for stitching extra heavy-weight materials. \* Throat space is 413mm (16-1/4") wide work space right of the needle allowing the operator to handle large bulky item with ease.
- \* Using the semi-rotary large shuttle hook & jumbo bobbin; saves time not having to change the bobbin as often.

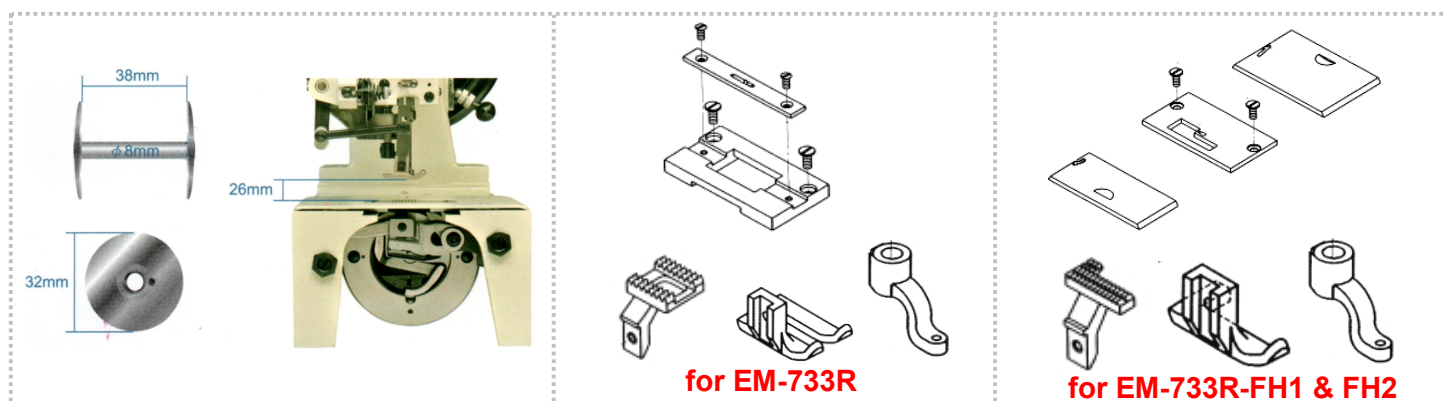

### Lockstitch Sewing Machine SPECIFICATIONS :

Max. Sewing Speed	700 s.p.m.	Bed Size	654 x 258 mm
Max. Stitch Length	15mm	Needle	Schmetz 1000 or 1000H
Alternating vertical movement	5 ~7 mm	Thread	#0 ~#00
Foot lift height	26mm( <b>EM-733R</b> ), 32mm( <b>EM-733R-FH1 &amp; FH2</b> )	Max. sewing thickness	0~25mm ( <b>EM-733R &amp; EM-733R-FH2</b> ) 5~32mm ( <b>EM-733R-FH1</b> )
Needle Bar Stroke	56mm (2.2")	Bobbin	Metal or Pre-wound
Working Space	413mm (16-1/4")	N.W./G.W.	126/141 kgs

### SEWING SAMPLE :

