


Extra Heavy Duty, Long Arm (36"), Upper & Lower Feed, Lockstitch Sewing Machine

EM-733R-36 (Foot lift : 26mm & sewing thickness 0 ~ 25mm)
Mod. EM-733R-FH1-36 (Foot lift : 32mm & sewing thickness 5 ~ 32mm)
EM-733R-FH2-36 (Foot lift : 32mm & sewing thickness 0 ~ 25mm)

This machine is equipped with semi-rotary large capacity shuttle hook, suitable for sewing extra heavy weight materials, such as safety and logging belts, luggage, cargo slings, buffing wheel, harnesses, construction barriers, parachutes, balloons and book binding.

FEATURES :

- * With upper & lower feed, the machine can sew accurately and easily several layers of heavy weight materials piled up together.
- * The lifting amount of presser foot is as high as 26mm(1") mod. **EM-733R** or 32mm(1-1/4") mod. **EM-733R-FH1 & FH2**, suitable for stitching extra heavy-weight materials. * Throat space is 915mm (36") wide work space right of the needle allowing the operator to handle large bulky item with ease.
- * Using the semi-rotary large shuttle hook & jumbo bobbin; saves time not having to change the bobbin as often.

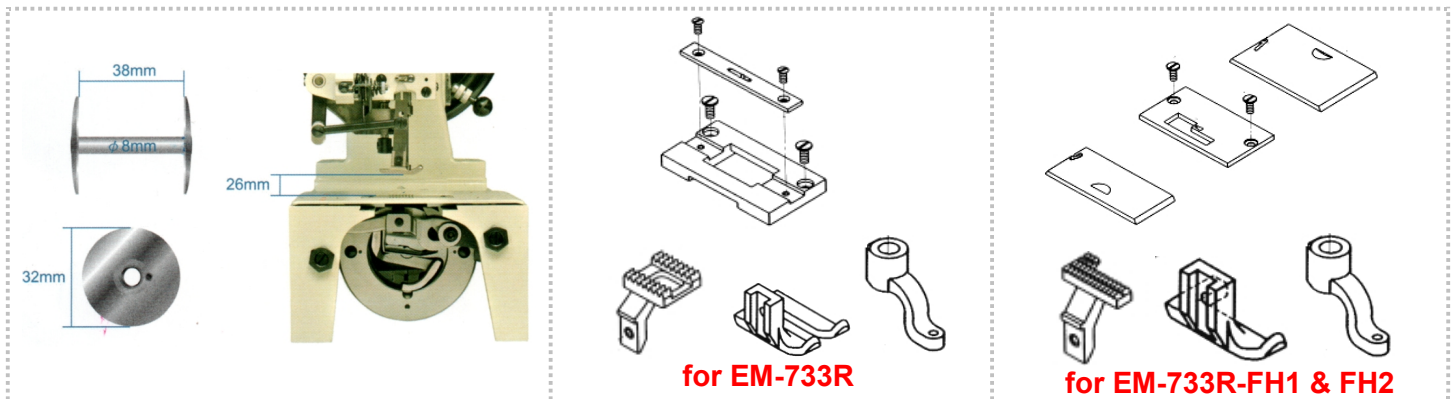

SPECIFICATIONS :

| | | | |
|-------------------------------|---|-----------------------|--|
| Max. Sewing Speed | 700 s.p.m. | Needle | Schmetz 1000 or 1000H |
| Max. Stitch Length | 15mm | Thread | #0 ~#00 |
| Alternating vertical movement | 5 ~7 mm | Max. sewing thickness | 0~25mm (EM-733R & EM-733R-FH2) 5~32mm (EM-733R-FH1) |
| Foot lift height | 26mm(EM-733R), 32mm(EM-733R-FH1 & FH2) | Bobbin | Metal or Pre-wound |
| Needle Bar Stroke | 56mm (2.2") | | |
| Working Space | 915mm (36") | | |

SEWING SAMPLE :

